

pybullet quickstart guide


[Erwin Coumans](#), 2017

Check most up-to-date Google Docs [version online](#), comments are welcome online

Introduction	2	setPhysicsEngineParameter	24
Hello pybullet World	2	resetSimulation	25
connect, disconnect	3	startStateLogging/stopStateLogging	25
setGravity	6	Synthetic Camera Rendering	27
loadURDF	6	computeViewMatrix	27
loadBullet, loadSDF, loadMJCF	7	computeViewMatrixFromYawPitchRoll	27
saveWorld	8	computeProjectionMatrix	28
stepSimulation	8	computeProjectionMatrixFOV	28
setRealTimeSimulation	8	getCameraImage	28
getBasePositionAndOrientation	9	getVisualShapeData	30
resetBasePositionAndOrientation	9	changeVisualShape	30
Transforms: Position and Orientation	10	loadTexture	31
getAPIVersion	11	Collision Detection Queries	31
Controlling a robot	11	getOverlappingObjects, getAABB	31
Base, Joints, Links	11	getContactPoints, getClosestPoints	32
getNumJoints, getJointInfo	12	rayTest, rayTestBatch	33
setJointMotorControl2/Array	13	Inverse Dynamics, Kinematics	34
getJointState(s), resetJointState	15	calculateInverseDynamics	34
enableJointForceTorqueSensor	16	calculateInverseKinematics	35
getLinkState	17	Virtual Reality	36
getBaseVelocity, resetBaseVelocity	18	getVREvents, setVRCameraState	36
applyExternalForce/Torque	19	Debug GUI, Lines, Text, Parameters	38
getNumBodies, getBodyInfo,		addUserDebugLine, Text	38
getBodyUniqueId, removeBody	20	addUserDebugParameter,	
createConstraint, removeConstraint,		readUserDebugParameter	39
changeConstraint	20	removeUserDebugItem	40
getNumConstraints,		setDebugObjectColor	40
getConstraintUniqueId	21	configureDebugVisualizer	40
getConstraintInfo	22	get/resetDebugVisualizerCamera	41
getDynamicsInfo/changeDynamics	22	getKeyboardEvents, getMouseEvent	42
setTimeStep	23	Build and install pybullet	43
		FAQ and Tips	46

Introduction

pybullet is an easy to use Python module for physics simulation, games, robotics and machine learning. With pybullet you can load articulated bodies from URDF, SDF, MJCF and other file formats. pybullet provides forward dynamics simulation, inverse dynamics computation, forward and inverse kinematics and collision detection and ray intersection queries. The [Bullet Physics SDK](#) includes pybullet robotic examples such as a simulated Minitaur quadruped, humanoids running using TensorFlow inference and KUKA arms grasping objects.

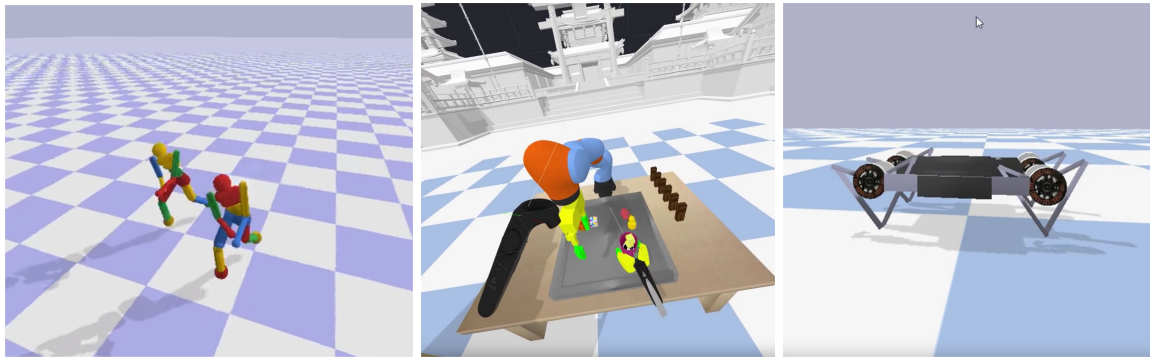

Aside from physics simulation, there are bindings to rendering, with a CPU renderer (TinyRenderer) and OpenGL visualization and support for Virtual Reality headsets such as HTC Vive and Oculus Rift. pybullet also has functionality to perform collision detection queries (closest points, overlapping pairs, ray intersection test etc) and to add debug rendering (debug lines and text). pybullet has cross-platform built-in client-server support for shared memory, UDP and TCP networking. So you can run pybullet on Linux connecting to a Windows VR server.

pybullet wraps the new [Bullet C-API](#), which is designed to be independent from the underlying physics engine and render engine, so we can easily migrate to newer versions of Bullet, or use a different physics engine or render engine. By default, pybullet uses the Bullet 2.x API on the CPU. We will expose Bullet 3.x running on GPU using OpenCL as well. There is also a C++ API similar to pybullet, see [b3RobotSimulatorClientAPI](#).

pybullet can be easily used with TensorFlow and frameworks such as OpenAI Gym.

Hello pybullet World

Here is a pybullet introduction script that we discuss step by step:

```

import pybullet as p
physicsClient = p.connect(p.GUI)#or p.DIRECT for non-graphical version
p.setGravity(0,0,-10)
planeId = p.loadURDF("plane.urdf")
cubeStartPos = [0,0,1]
cubeStartOrientation = p.getQuaternionFromEuler([0,0,0])
boxId = p.loadURDF("r2d2.urdf",cubeStartPos, cubeStartOrientation)
p.stepSimulation()
cubePos, cubeOrn = p.getBasePositionAndOrientation(boxId)
print(cubePos,cubeOrn)
p.disconnect()

```

connect, disconnect

After importing the pybullet module, the first thing to do is 'connecting' to the physics simulation. pybullet is designed around a client-server driven API, with a client sending commands and a physics server returning the status. pybullet has some build-in physics servers: DIRECT and GUI. DIRECT connection will execute the physics simulation and rendering in the same process as pybullet.

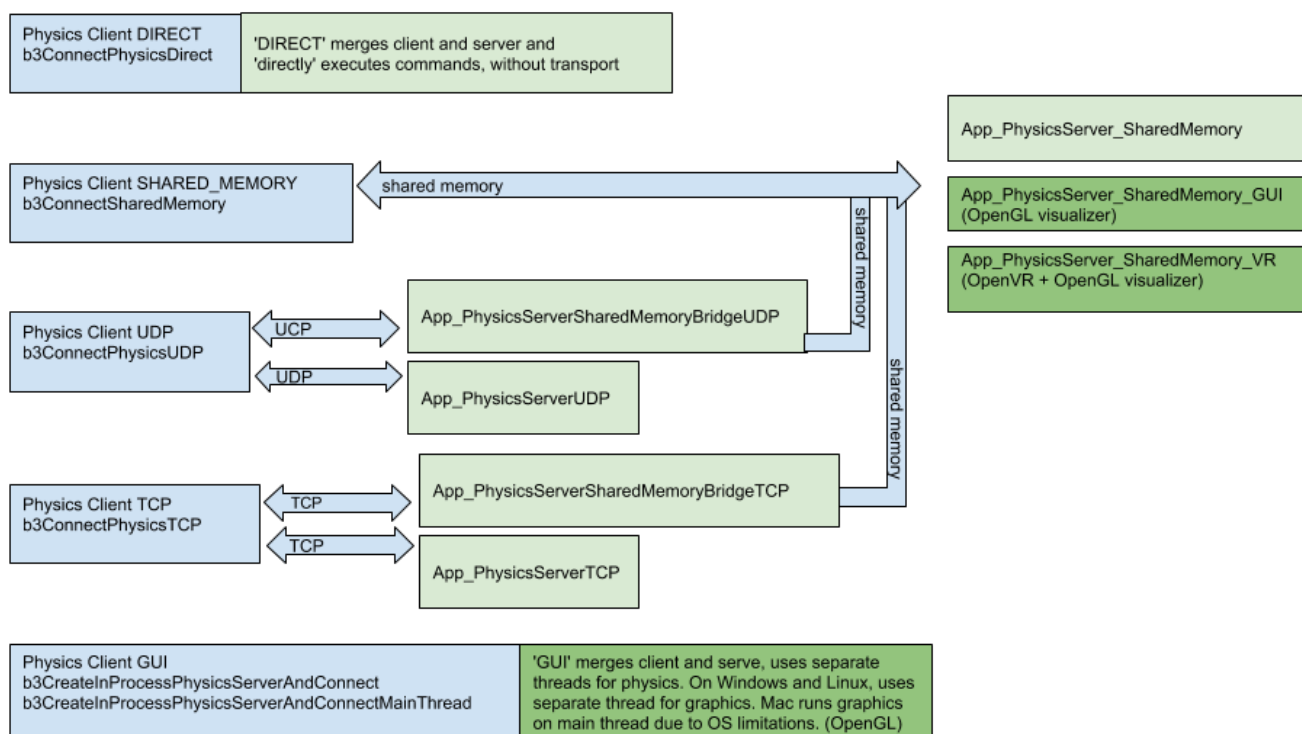


Diagram with various physics client (blue) and physics server (green) options. Dark green servers provide OpenGL debug visualization.

connect using DIRECT, GUI

The DIRECT connection sends the commands directly to the physics engine, without using any transport layer, and directly returns the status after executing the command.

The GUI connection will create a new graphical user interface (GUI) with 3D OpenGL rendering, within the same process space as pybullet. On Linux and Windows this GUI runs in a separate thread, while on OSX it runs in the same thread due to operating system limitations. On Mac OSX you may see a spinning wheel in the OpenGL Window, until you run a 'stepSimulation' or other pybullet command.

The commands and status messages are sent between pybullet client and the GUI physics simulation server using an ordinary memory buffer.

It is also possible to connect to a physics server in a different process on the same machine or on a remote machine using SHARED_MEMORY, UDP or TCP networking. See the section about Shared Memory, UDP and TCP for details.

Unlike almost all other methods, this method doesn't parse keyword arguments, due to backward compatibility.

The connect input arguments are:

required	connection mode	integer: DIRECT, GUI, SHARED_ MEMORY, UDP, TCP	DIRECT mode create a new physics engine and directly communicates with it. GUI will create a physics engine with graphical GUI frontend and communicates with it. SHARED_MEMORY will connect to an existing physics engine process on the same machine, and communicates with it over shared memory. UDP will connect to an existing physics server over UDP networking.
optional	key	int	in SHARED_MEMORY mode, optional shared memory key. When starting ExampleBrowser or SharedMemoryPhysics_* you can use optional command-line --shared_memory_key to set the key. This allows to run multiple servers on the same machine.
optional	UdpNetworkAddress (UDP and TCP)	string	IP address or host name, for example "127.0.0.1" or "localhost" or "mymachine.domain.com"
optional	UdpNetworkPort (UDP and TCP)	integer	UDP port number. Default UDP port is 1234, default TCP port is 6667 (matching the defaults in the server)
optional	options	string	command-line option passed into the GUI server. At the moment, only the --opengl2 flag is enabled: by default, Bullet uses OpenGL3, but some environments such as virtual machines or remote desktop clients only support OpenGL2. Only one command-line argument can be passed on at the moment.

connect returns a physics client id or -1 if not connected. The physics client Id is an optional argument to most of the other pybullet commands. If you don't provide it, it will assume physics client id = 0. You can connect to multiple different physics servers, except for GUI.

For example:

```
pybullet.connect(pybullet.DIRECT)
pybullet.connect(pybullet.GUI, options="--opengl2")
pybullet.connect(pybullet.SHARED_MEMORY,1234)
pybullet.connect(pybullet.UDP,"192.168.0.1")
pybullet.connect(pybullet.UDP,"localhost", 1234)
pybullet.connect(pybullet.TCP,"localhost", 6667)
```

connect using Shared Memory

There are a few physics servers that allow shared memory connection: the App_SharedMemoryPhysics, App_SharedMemoryPhysics_GUI and the Bullet Example Browser has one example under Experimental/Physics Server that allows shared memory connection. This will let you execute the physics simulation and rendering in a separate process.

You can also connect over shared memory to the App_SharedMemoryPhysics_VR, the Virtual Reality application with support for head-mounted display and 6-dof tracked controllers such as HTC Vive and Oculus Rift with Touch controllers. Since the Valve OpenVR SDK only works properly under Windows, the App_SharedMemoryPhysics_VR can only be build under Windows using premake (preferably) or cmake.

connect using UDP or TCP networking

For UDP networking, there is a App_PhysicsServerUDP that listens to a certain UDP port. It uses the open source [enet](#) library for reliable UDP networking. This allows you to execute the physics simulation and rendering on a separate machine. For TCP pybullet uses the [csocket](#) library. This can be useful when using SSH tunneling from a machine behind a firewall to a robot simulation. For example you can run a control stack or machine learning using pybullet on Linux, while running the physics server on Windows in Virtual Reality using HTC Vive or Rift.

One more UDP application is the App_PhysicsServerSharedMemoryBridgeUDP application that acts as a bridge to an existing physics server: you can connect over UDP to this bridge, and the bridge connects to a physics server using shared memory: the bridge passes messages between client and server. In a similar way there is a TCP version (replace UDP by TCP).

disconnect

You can disconnect from a physics server, using the physics client Id returned by the connect call (if non-negative). A 'DIRECT' or 'GUI' physics server will shutdown. A separate (out-of-process) physics server will keep on running. See also 'resetSimulation' to remove all items.

setGravity

By default, there is no gravitational force enabled. *setGravity* lets you set the default gravity force for all objects.

The setGravity input parameters are: (no return value)

required	gravityX	float	gravity force along the X world axis
required	gravityY	float	gravity force along the Y world axis
required	gravityZ	float	gravity force along the Z world axis
optional	physicsClientId	int	if you connect to multiple physics servers, you can pick which one.

loadURDF

The loadURDF will send a command to the physics server to load a physics model from a Universal Robot Description File (URDF). The URDF file is used by the ROS project (Robot Operating System) to describe robots and other objects, it was created by the WillowGarage and the Open Source Robotics Foundation (OSRF). Many robots have public URDF files, you can find a description and tutorial here: <http://wiki.ros.org/urdf/Tutorials>

Important note: most joints (slider, revolute, continuous) have motors enabled by default that prevent free motion. This is similar to a robot joint with a very high-friction harmonic drive. You should set the joint motor control mode and target settings using `pybullet.setJointMotorControl2`. See the `setJointMotorControl2` API for more information.

Warning: by default, pybullet will cache some files to speed up loading. You can disable file caching using `setPhysicsEngineParameter(enableFileCaching=0)`.

The loadURDF arguments are:

required	fileName	string	a relative or absolute path to the URDF file on the file system of the physics server.
optional	basePosition	vec3	create the base of the object at the specified position in world space coordinates [X,Y,Z]
optional	baseOrientation	vec4	create the base of the object at the specified orientation

			as world space quaternion [X,Y,Z,W]
optional	useMaximalCoordinates	int	Experimental. By default, the joints in the URDF file are created using the reduced coordinate method: the joints are simulated using the Featherstone Articulated Body algorithm (btMultiBody in Bullet 2.x). The useMaximalCoordinates option will create a 6 degree of freedom rigid body for each link, and constraints between those rigid bodies are used to model joints.
optional	useFixedBase	int	force the base of the loaded object to be static
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

loadURDF returns a body unique id, a non-negative integer value. If the URDF file cannot be loaded, this integer will be negative and not a valid body unique id.

loadBullet, loadSDF, loadMJCF

You can also load objects from other file formats, such as .bullet, .sdf and .mjcf. Those file formats support multiple objects, so the return value is a list of object unique ids. The SDF format is explained in detail at <http://sdformat.org>. The loadSDF command only extracts some essential parts of the SDF related to the robot models and geometry, and ignores many elements related to cameras, lights and so on. The loadMJCF command performs basic import of MuJoCo MJCF xml files, used in OpenAI Gym. See also the Important note under loadURDF related to default joint motor settings, and make sure to use setJointMotorControl2.

required	fileName	string	a relative or absolute path to the URDF file on the file system of the physics server.
optional	useMaximalCoordinates	int	Experimental. See loadURDF for more details.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

loadBullet, loadSDF and loadMJCF will return an array of object unique ids:

objectUniquelds	list of int	the list includes the object unique id for each object loaded.
-----------------	-------------	--

saveWorld

You can create a snapshot of the current world as a pybullet Python file, stored on the server. `saveWorld` can be useful as a basic editing feature, setting up the robot, joint angles, object positions and environment for example in VR. Later you can just load the pybullet Python file to re-create the world. Note that not all settings are stored in the world file at the moment.

The input arguments are:

required	fileName	string	filename of the pybullet file.
optional	clientServerId	int	if you are connected to multiple servers, you can pick one

stepSimulation

`stepSimulation` will perform all the actions in a single forward dynamics simulation step such as collision detection, constraint solving and integration.

`stepSimulation` input arguments are optional:

optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.
----------	-----------------	-----	---

`stepSimulation` has no return values.

See also `setRealTimeSimulation` to automatically let the physics server run forward dynamics simulation based on its real-time clock.

setRealTimeSimulation

By default, the physics server will not step the simulation, unless you explicitly send a 'stepSimulation' command. This way you can maintain control determinism of the simulation. It is possible to run the simulation in real-time by letting the physics server automatically step the simulation according to its real-time-clock (RTC) using the `setRealTimeSimulation` command. If you enable the real-time simulation, you don't need to call 'stepSimulation'.

Note that `setRealTimeSimulation` has no effect in DIRECT mode: in DIRECT mode the physics server and client happen in the same thread and you trigger every command. In GUI mode and in Virtual Reality mode, and TCP/UDP mode, the physics server runs in a separate thread from the client (pybullet), and `setRealSimulation` allows the physicsserver thread to add additional calls to `stepSimulation`.

The input parameters are:

required	enableRealTimeSimulation	int	0 to disable real-time simulation, 1 to enable
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

getBasePositionAndOrientation

getBasePositionAndOrientation reports the current position and orientation of the base (or root link) of the body in Cartesian world coordinates. The orientation is a quaternion in [x,y,z,w] format.

The getBasePositionAndOrientation input parameters are:

required	objectUniqueId	int	object unique id, as returned from loadURDF.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

getBasePositionAndOrientation returns the position list of 3 floats and orientation as list of 4 floats in [x,y,z,w] order. Use getEulerFromQuaternion to convert the quaternion to Euler if needed.

See also resetBasePositionAndOrientation to reset the position and orientation of the object.

This completes the first pybullet script. Bullet ships with several URDF files in the Bullet/data folder.

resetBasePositionAndOrientation

You can reset the position and orientation of the base (root) of each object. It is best only to do this at the start, and not during a running simulation, since the command will override the effect of all physics simulation.

The input arguments to resetBasePositionAndOrientation are:

required	objectUniqueId	int	object unique id, as returned from loadURDF.
required	basePosition	vec3	reset the base of the object at the specified position in world space coordinates [X,Y,Z]

required	baseOrientation	vec4	reset the base of the object at the specified orientation as world space quaternion [X,Y,Z,W]
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

There are no return arguments.

Transforms: Position and Orientation

The position of objects can be expressed in Cartesian world space coordinates [x,y,z]. The orientation (or rotation) of objects can be expressed using quaternions [x,y,z,w], euler angles [yaw, pitch, roll] or 3x3 matrices. pybullet provides a few helper functions to convert between quaternions, euler angles and 3x3 matrices. In additions there are some functions to multiply and invert transforms.

getQuaternionFromEuler and getEulerFromQuaternion

The pybullet API uses quaternions to represent orientations. Since quaternions are not very intuitive for people, there are two APIs to convert between quaternions and Euler angles.

The getQuaternionFromEuler input arguments are:

required	eulerAngle	vec3: list of 3 floats	The X,Y,Z Euler angles are in radians, accumulating 3 rotations expressing the roll around the X, pitch around Y and yaw around the Z axis.
----------	------------	------------------------	---

getQuaternionFromEuler returns a list of 3 floating point values, a vec3.

The getEulerFromQuaternion input arguments are:

required	quaternion	vec4: list of 4 floats	The quaternion format is [x,y,z,w]
----------	------------	------------------------	------------------------------------

getEulerFromQuaternion returns a quaternion, vec4 list of 4 floating point values [X,Y,Z,W]

getMatrixFromQuaternion

getMatrixFromQuaternion is a utility API to create a 3x3 matrix from a quaternion. The input is a quaternion and output a list of 9 floats, representing the matrix.

multiplyTransforms, invertTransform

pybullet provides a few helper functions to multiply and inverse transforms. This can be helpful to transform coordinates from one to the other coordinate system.


getAPIVersion

You can query for the API version in a year-month-0-day format. You can only connect between physics client/server of the same API version, with the same number of bits (32-bit / 64bit).

Controlling a robot

In the Introduction we already showed how to initialize pybullet and load some objects. If you replace the file name in the loadURDF command with "r2d2.urdf" you can simulate a R2D2 robot from the ROS tutorial. Let's control this R2D2 robot to move, look around and control the gripper. For this we need to know how to access its joint motors.

Base, Joints, Links

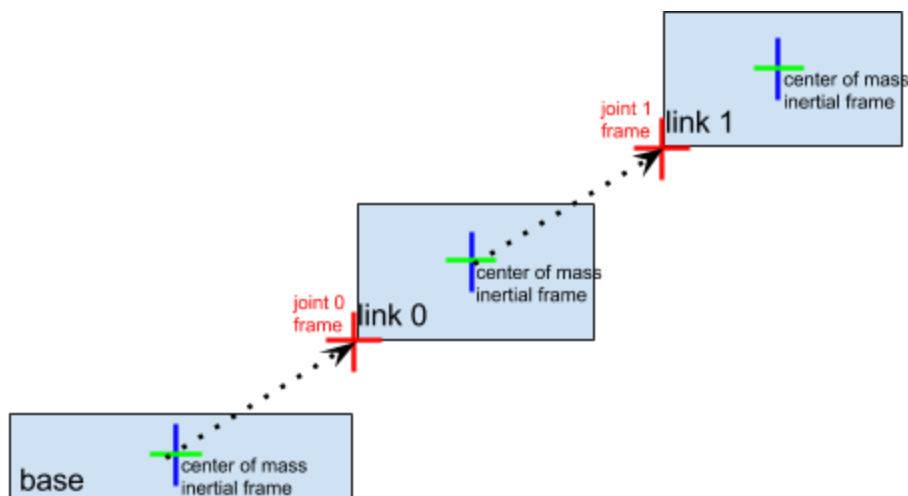

A simulated robot as described in a URDF file has a base, and optionally links connected by joints. Each joint connects one parent link to a child link. At the root of the hierarchy there is a single root parent that we call base. The base can be either fully fixed, 0 degrees of freedom, or fully free, with 6 degrees of freedom. Since each link is connected to a parent with a single joint, the number of joints is equal to the number of links. Regular links have link indices in the range $[0..getNumJoints())$. Since the base is not a regular 'link', we use the convention of -1 as its link index. We use the convention that joint frames are expressed relative to the parents center of mass inertial frame, which is aligned with the principle axis of inertia.

getNumJoints, getJointInfo

After you load a robot you can query the number of joints using the `getNumJoints` API. For the `r2d2.urdf` this should return 15.

`getNumJoints` input parameters:

required	bodyUniqueId	int	the body unique id, as returned by <code>loadURDF</code> etc.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

`getNumJoints` returns an integer value representing the number of joints.

getJointInfo

For each joint we can query some information, such as its name and type.

`getJointInfo` input parameters

required	bodyUniqueId	int	the body unique id, as returned by <code>loadURDF</code> etc.
required	jointIndex	int	an index in the range <code>[0 .. getNumJoints(bodyUniqueId)]</code>
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

`getJointInfo` returns a list of information:

jointIndex	int	the same joint index as the input parameter
jointName	string	the name of the joint, as specified in the URDF (or SDF etc) file
jointType	int	type of the joint, this also implies the number of position and velocity variables. <code>JOINT_REVOLUTE</code> , <code>JOINT_PRISMATIC</code> , <code>JOINT_SPHERICAL</code> , <code>JOINT_PLANAR</code> , <code>JOINT_FIXED</code> . See the section on Base, Joint and Links for more details.
qIndex	int	the first position index in the positional state variables for this body
uIndex	int	the first velocity index in the velocity state variables for this body
flags	int	reserved
jointDamping	float	the joint damping value, as specified in the URDF file
jointFriction	float	the joint friction value, as specified in the URDF file
jointLowerLimit	float	Positional lower limit for slider and revolute (hinge) joints.
jointUpperLimit	float	Positional upper limit for slider and revolute joints. Values ignored in case upper limit < lower limit.
jointMaxForce	float	Maximum force specified in URDF (possibly other file formats) Note that this value

		is not automatically used. You can use maxForce in 'setJointMotorControl2'.
jointMaxVelocity	float	Maximum velocity specified in URDF. Note that the maximum velocity is not used in actual motor control commands at the moment.
linkName	string	the name of the link, as specified in the URDF (or SDF etc.) file

setJointMotorControl2/Array

Note: *setJointMotorControl* is obsolete and replaced by *setJointMotorControl2* API. (Or even better use *setJointMotorControlArray*).

We can control a robot by setting a desired control mode for one or more joint motors. During the stepSimulation the physics engine will simulate the motors to reach the given target value that can be reached within the maximum motor forces and other constraints. Each revolute joint and prismatic joint is motorized by default. There are 3 different motor control modes: position control, velocity control and torque control.

You can effectively disable the motor by using a force of 0. You need to disable motor in order to use direct torque control. For example:

```
maxForce = 0
mode = p.VELLOCITY_CONTROL
p.setJointMotorControl2(objUid, jointIndex,
    controlMode=mode, force=maxForce)
```

If you want a wheel to maintain a constant velocity, with a max force you can use:

```
maxForce = 500
p.setJointMotorControl2(bodyUniqueId=objUid,
    linkIndex=0,
    controlMode=p.VELLOCITY_CONTROL,
    targetVelocity = targetVel,
    force = maxForce)
```

The input arguments to setJointMotorControl2 are:

required	bodyUniqueId	int	body unique id as returned from loadURDF etc.
required	linkIndex	int	link index in range [0..getNumJoints(bodyUniqueId)] (note that link index == joint index)
required	controlMode	int	POSITION_CONTROL (which is in fact CONTROL_MODE_POSITION_VELOCITY_PD), VELOCITY_CONTROL, TORQUE_CONTROL

optional	targetPosition	float	in POSITION_CONTROL the targetValue is target position of the joint
optional	targetVelocity	float	in VELOCITY_CONTROL and POSITION_CONTROL the targetVelocity is the desired velocity of the joint, see implementation note below. Note that the targetVelocity is not the maximum joint velocity. In POSITION_CONTROL/CONTROL_MODE_POSITION_VELOCITY_PD, the final target velocity is computed using: $kp*(erp*(desiredPosition-currentPosition)/dt)+currentVelocity+kd*(m_desiredVelocity - currentVelocity)$
optional	force	float	in POSITION_CONTROL and VELOCITY_CONTROL this is the maximum motor force used to reach the target value. In TORQUE_CONTROL this is the force/torque to be applied each simulation step.
optional	positionGain	float	See implementation note below
optional	velocityGain	float	See implementation note below
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

Note: the actual implementation of the joint motor controller is as a constraint for POSITION_CONTROL and VELOCITY_CONTROL, and as an external force for TORQUE_CONTROL:

method	implementation	component	constraint error to be minimized
POSITION_CONTROL	constraint	velocity and position constraint	error = $position_gain*(desired_position-actual_position)+velocity_gain*(desired_velocity-actual_velocity)$
VELOCITY_CONTROL	constraint	pure velocity constraint	error = desired_velocity - actual_velocity
TORQUE_CONTROL	external force		

Generally it is best to start with VELOCITY_CONTROL or POSITION_CONTROL. It is much harder to do TORQUE_CONTROL (force control) since simulating the correct forces relies on very accurate URDF/SDF file parameters and system identification (correct masses, inertias, center of mass location, joint friction etc).

setJointMotorControlArray

Instead of making individual calls for each joint, you can pass arrays for all inputs to reduce calling overhead dramatically.

`setJointMotorControlArray` takes the same parameters as `setJointMotorControl2`, except replacing integers with lists of integers.

The input arguments to `setJointMotorControlArray` are:

required	<code>bodyUniqueId</code>	int	body unique id as returned from <code>loadURDF</code> etc.
required	<code>linkIndices</code>	list of int	link index in range <code>[0..getNumJoints(bodyUniqueId)]</code> (note that link index == joint index)
required	<code>controlMode</code>	int	POSITION_CONTROL, VELOCITY_CONTROL, TORQUE_CONTROL
optional	<code>targetPositions</code>	list of float	in POSITION_CONTROL the <code>targetValue</code> is target position of the joint
optional	<code>targetVelocities</code>	list of float	in VELOCITY_CONTROL and POSITION_CONTROL the <code>targetValue</code> is target velocity of the joint, see implementation note below.
optional	<code>forces</code>	list of float	in POSITION_CONTROL and VELOCITY_CONTROL this is the maximum motor force used to reach the target value. In TORQUE_CONTROL this is the force/torque to be applied each simulation step.
optional	<code>positionGains</code>	list of float	See implementation note below
optional	<code>velocityGains</code>	list of float	See implementation note below
optional	<code>physicsClientId</code>	int	if you are connected to multiple servers, you can pick one.

See `bullet3/examples/pybullet/tensorflow/humanoid_running.py` for an example of using `setJointMotorControlArray`.

getJointState(s), resetJointState

We can query several state variables from the joint using `getJointState`, such as the joint position, velocity, joint reaction forces and joint motor torque.

`getJointState` input parameters

required	<code>bodyUniqueId</code>	int	body unique id as returned by <code>loadURDF</code> etc
required	<code>jointIndex</code>	int	link index in range <code>[0..getNumJoints(bodyUniqueId)]</code>
optional	<code>physicsClientId</code>	int	if you are connected to multiple servers, you can pick one.

`getJointState` output

jointPosition	float	The position value of this joint.
jointVelocity	float	The velocity value of this joint.
jointReactionForces	list of 6 floats	These are the joint reaction forces, if a torque sensor is enabled for this joint it is [Fx, Fy, Fz, Mx, My, Mz]. Without torque sensor, it is [0,0,0,0,0,0].
appliedJointMotorTorque	float	This is the motor torque applied during the last stepSimulation

getJointStates is the array version of getJointState. Instead of passing in a single jointIndex, you pass in a list of jointIndices.

resetJointState

You can reset the state of the joint. It is best only to do this at the start, while not running the simulation: resetJointState overrides all physics simulation. Note that we only support 1-DOF motorized joints at the moment, sliding joint or revolute joints.

required	bodyUniqueld	int	body unique id as returned by loadURDF etc
required	jointIndex	int	joint index in range [0..getNumJoints(bodyUniqueld)]
required	targetValue	float	the joint position (angle in radians or position)
optional	targetVelocity	float	the joint velocity (angular or linear velocity)
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

enableJointForceTorqueSensor

You can enable or disable a joint force/torque sensor in each joint. Once enabled, if you perform a stepSimulation, the 'getJointState' will report the joint reaction forces in the fixed degrees of freedom: a fixed joint will measure all 6DOF joint forces/torques. A revolute/hinge joint force/torque sensor will measure 5DOF reaction forces along all axis except the hinge axis. The applied force by a joint motor is available in the appliedJointMotorTorque of getJointState.

The input arguments to enableJointForceTorqueSensor are:

required	bodyUniqueld	int	body unique id as returned by loadURDF etc
required	jointIndex	int	joint index in range [0..getNumJoints(bodyUniqueld)]
optional	enableSensor	int	1/True to enable, 0/False to disable the force/torque sensor
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

getLinkState

You can also query the Cartesian world position and orientation for the center of mass of each link using `getLinkState`. It will also report the local inertial frame of the center of mass to the URDF link frame, to make it easier to compute the graphics/visualization frame.


getLinkState input parameters

required	bodyUniqueId	int	
required	linkIndex	int	
optional	computeLinkVelocity	int	If set to 1, the Cartesian world velocity will be computed and returned.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

getLinkState return values

linkWorldPosition	vec3, list of 3 floats	Cartesian position of center of mass
linkWorldOrientation	vec4, list of 4 floats	Cartesian orientation of center of mass, in quaternion [x,y,z,w]
localInertialFramePosition	vec3, list of 3 floats	local position offset of inertial frame (center of mass) expressed in the URDF link frame
localInertialFrameOrientation	vec4, list of 4 floats	local orientation (quaternion [x,y,z,w]) offset of the inertial frame expressed in URDF link frame.
worldLinkFramePosition	vec3, list of 3 floats	world position of the URDF link frame
worldLinkFrameOrientation	vec4, list of 4 floats	world orientation of the URDF link frame
worldLinkLinearVelocity	vec3, list of 3 floats	Cartesian world velocity. Only returned if <code>computeLinkVelocity</code> non-zero.
worldLinkAngularVelocity	vec3, list of 3 floats	Cartesian world velocity. Only returned if <code>computeLinkVelocity</code> non-zero.

The relationship between URDF link frame and the center of mass frame (both in world space) is: $urdfLinkFrame = comLinkFrame * localInertialFrame.inverse()$. For more information about the link and inertial frame, see the [ROS URDF tutorial](#).

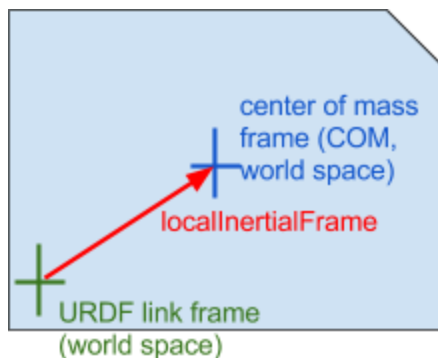

Example scripts (could be out-of-date, check actual Bullet/examples/pybullet/examples folder.)

examples/pybullet/tensorflow/humanoid_running.py	load a humanoid and use a trained neural network to control the running using TensorFlow, trained by OpenAI
examples/pybullet/gym	Minitaur environment for OpenAI GYM and TensorFlow
examples/pybullet/examples/quadruped.py	load a quadruped from URDF file, step the simulation, control the motors for a simple hopping gait based on sine waves. Will also log the state to file using <code>p.startStateLogging</code> . See video .
examples/quadruped_playback.py	Create a quadruped (Minitaur), read log file and set positions as motor control targets.
examples/pybullet/examples/testrender.py	load a URDF file and render an image, get the pixels (RGB, depth, segmentation mask) and display the image using Matplotlib.
examples/pybullet/examples/testrender_np.py	Similar to testrender.py, but speed up the pixel transfer using NumPy arrays. Also includes simple benchmark/timings.
examples/pybullet/examples/saveWorld.py	Save the state (position, orientation) of objects into a pybullet Python scripts. This is mainly useful to setup a scene in VR and save the initial state. Not all state is serialized.
examples/pybullet/examples/inverse_kinematics.py	Show how to use the <code>calculateInverseKinematics</code> command, creating a Kuka ARM clock
examples/pybullet/examples/rollPitchYaw.py	Show how to use slider GUI widgets
examples/pybullet/examples/constraint.py	Programmatically create a constraint between links.
examples/pybullet/examples/vrhand.py	Control a hand using a VR glove, tracked by a VR controller. See video .

getBaseVelocity, resetBaseVelocity

You get access to the linear and angular velocity of the base of a body using `getBaseVelocity`. The input parameters are:

required	bodyUniqueId	int	body unique id, as returned from the load* methods.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

This returns a list of two vector3 values (3 floats in a list) representing the linear velocity [x,y,z] and angular velocity [wx,wy,wz] in Cartesian worldspace coordinates.

You can reset the linear and/or angular velocity of the base of a body using resetBaseVelocity. The input parameters are:

required	objectUniqueId	int	body unique id, as returned from the load* methods.
optional	linearVelocity	vec3, list of 3 floats	linear velocity [x,y,z] in Cartesian world coordinates.
optional	angularVelocity	vec3, list of 3 floats	angular velocity [wx,wy,wz] in Cartesian world coordinates.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

applyExternalForce/Torque

You can apply a force or torque to a body using applyExternalForce and applyExternalTorque. Note that this method will only work when explicitly stepping the simulation using stepSimulation, in other words: setRealTimeSimulation(0). After each simulation step, the external forces are cleared to zero. If you are using 'setRealTimeSimulation(1)', applyExternalForce/Torque will have undefined behavior (either 0, 1 or multiple force/torque applications).

The input parameters are:

required	objectUniqueId	int	object unique id as returned by load methods.
required	linkIndex	int	link index or -1 for the base.
required	forceObj	vec3, list of 3 floats	force/torque vector to be applied [x,y,z]. See flags for coordinate system.
required	posObj	vec3, list of 3 floats	position on the link where the force is applied. Only for applyExternalForce. See flags for coordinate system.
required	flags	int	Specify the coordinate system of force/position: either WORLD_FRAME for Cartesian world coordinates or LINK_FRAME for local link coordinates.
optional	physicsClientId	int	

getNumBodies, getBodyInfo, getBodyUniqueld, removeBody

getNumBodies will return the total number of bodies in the physics server.

If you used 'getNumBodies' you can query the body unique ids using 'getBodyUniqueld'. Note that all APIs already return body unique ids, so you typically never need to use getBodyUniqueld if you keep track of them.

getBodyInfo will return the base name, as extracted from the URDF, SDF, MJCF or other file.

removeBody will remove a body by its body unique id (from loadURDF, loadSDF etc).

createConstraint, removeConstraint, changeConstraint

URDF, SDF and MJCF specify articulated bodies as a tree-structures without loops. The 'createConstraint' allows you to connect specific links of bodies to close those loops. See [Bullet/examples/pybullet/examples/quadruped.py](#) how to connect the legs of a quadruped 5-bar closed loop linkage. In addition, you can create arbitrary constraints between objects, and between an object and a specific world frame. See

[Bullet/examples/pybullet/examples/constraint.py](#) for an example.

It can also be used to control the motion of physics objects, driven by animated frames, such as a VR controller. It is better to use constraints, instead of setting the position or velocity directly for such purpose, since those constraints are solved together with other dynamics constraints.

createConstraint has the following input parameters:

required	parentBodyUniqueld	int	parent body unique id
required	parentLinkIndex	int	parent link index (or -1 for the base)
required	childBodyUniqueld	int	child body unique id, or -1 for no body (specify a non-dynamic child frame in world coordinates)
required	childLinkIndex	int	child link index, or -1 for the base
required	jointType	int	joint type: JOINT_PRISMATIC, JOINT_FIXED, JOINT_POINT2POINT
required	jointAxis	vec3, list of 3 floats	joint axis, in child link frame
required	parentFramePosition	vec3, list of 3 floats	position of the joint frame relative to parent center of mass frame.
required	childFramePosition	vec3, list of 3 floats	position of the joint frame relative to a given child center of mass frame (or world origin if no child)

			specified)
optional	parentFrameOrientation	vec4, list of 4 floats	the orientation of the joint frame relative to parent center of mass coordinate frame
optional	childFrameOrientation	vec4, list of 4 floats	the orientation of the joint frame relative to the child center of mass coordinate frame (or world origin frame if no child specified)
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

createConstraint will return an integer unique id, that can be used to change or remove the constraint.

changeConstraint

changeConstraint allows you to change parameters of an existing constraint. The input parameters are:

required	userConstraintUniqueId	int	unique id returned by createConstraint
optional	jointChildPivot	vec3, list of 3 floats	updated child pivot, see 'createConstraint'
optional	jointChildFrameOrientation	vec4, list of 4 floats	updated child frame orientation as quaternion
optional	maxForce	float	maximum force that constraint can apply
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

See also [Bullet/examples/pybullet/examples/constraint.py](#)

removeConstraint will remove a constraint, given by its unique id. Its input parameters are:

required	userConstraintUniqueId	int	unique id as returned by createConstraint
optional	physicsClientId	int	unique id as returned by 'connect'

getNumConstraints, getConstraintUniqueId

You can query for the total number of constraints, created using 'createConstraint'. Optional parameter is the int physicsClientId.

getConstraintUniqueld

getConstraintUniqueld will take a serial index in range 0..getNumConstraints, and reports the constraint unique id. Note that the constraint unique ids may not be contiguous, since you may remove constraints. The input is the integer serial index and optionally a physicsClientId.

getConstraintInfo

You can query the constraint info give a constraint unique id.

The input parameters are

required	constraintUniqueld	int	unique id as returned by createConstraint
optional	physicsClientId	int	unique id as returned by 'connect'

The output list is:

parentBodyUniqueld	int	See createConstraint
parentJointIndex	int	See createConstraint
childBodyUniqueld	int	See createConstraint
childLinkIndex	int	See createConstraint
constraintType	int	See createConstraint
jointAxis	vec3, list of 3 floats	See createConstraint
jointPivotInParent	vec3, list of 3 floats	See createConstraint
jointPivotInChild	vec3, list of 3 floats	See createConstraint
jointFrameOrientationParent	vec4, list of 4 floats	See createConstraint
jointFrameOrientationChild	vec4, list of 4 floats	See createConstraint
maxAppliedForce	float	See createConstraint

getDynamicsInfo/changeDynamics

You can get information about the mass, center of mass, friction and other properties of the base and links.

The input parameters to getDynamicsInfo are:

required	bodyUniqueId	int	object unique id, as returned by loadURDF etc.
required	linkIndex	int	link (joint) index or -1 for the base.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The return information is limited, we will expose more information when we need it:

mass	double	mass in kg
lateral_friction	double	friction coefficient

changeDynamics

You can change the properties such as mass, friction and restitution coefficients using `changeDynamics`.

The input parameters are:

required	bodyUniqueId	int	object unique id, as returned by loadURDF etc.
required	linkIndex	int	link index or -1 for the base
optional	mass	double	change the mass of the link (or base for linkIndex -1)
optional	lateralFriction	double	lateral (linear) contact friction
optional	spinningFriction	double	torsional friction around the contact normal
optional	rollingFriction	double	torsional friction orthogonal to contact normal
optional	restitution	double	bouncyness of contact. Keep it a bit less than 1.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

setTimeStep

You can set the physics engine timestep that is used when calling 'stepSimulation'. It is best to only call this method at the start of a simulation. Don't change this time step regularly. `setTimeStep` can also be achieved using the new `setPhysicsEngineParameter` API.

The input parameters are:

required	timeStep	float	Each time you call 'stepSimulation' the timeStep will proceed with 'timeStep'.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

setPhysicsEngineParameter

You can set physics engine parameters using the setPhysicsEngineParameter API. The following input parameters are exposed:

optional	fixedTimeStep	float	physics engine timestep in fraction of seconds, each time you call 'stepSimulation'. Same as 'setTimeStep'
optional	numSolverIterations	int	Choose the number of constraint solver iterations.
optional	useSplitImpulse	int	Advanced feature, only when using maximal coordinates: split the positional constraint solving and velocity constraint solving in two stages, to prevent huge penetration recovery forces.
optional	splitImpulsePenetrationThreshold	float	Related to 'useSplitImpulse': if the penetration for a particular contact constraint is less than this specified threshold, no split impulse will happen for that contact.
optional	numSubSteps	int	Subdivide the physics simulation step further by 'numSubSteps'. This will trade performance over accuracy.
optional	collisionFilterMode	int	Use 0 for default collision filter: (group A&maskB) AND (groupB&maskA). Use 1 to switch to the OR collision filter: (group A&maskB) OR (groupB&maskA)
optional	contactBreakingThreshold	float	Contact points with distance exceeding this threshold are not processed by the LCP solver. In addition, AABBs are extended by this number. Defaults to 0.02 in Bullet 2.x.
optional	maxNumCmdPer1ms	int	Experimental: add 1ms sleep if the number of commands executed exceed this threshold.
optional	enableFileCaching	int	Set to 0 to disable file caching, such as .obj wavefront file loading
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

resetSimulation

resetSimulation will remove all objects from the world and reset the world to initial conditions. It takes one optional parameter: the physics client Id (in case you created multiple physics server connections).

startStateLogging/stopStateLogging

State logging lets you log the state of the simulation, such as the state of one or more objects after each simulation step (after each call to stepSimulation or automatically after each simulation step when setRealTimeSimulation is enabled). This allows you to record trajectories of objects. There is also the option to log the common state of bodies such as base position and orientation, joint positions (angles) and joint motor forces.

All log files generated using startStateLogging can be read using C++ or Python scripts. See `quadruped_playback.py` and `kuka_with_cube_playback.py` for Python scripts reading the log files. You can use `bullet3/examples/Utils/RobotLoggingUtil.cpp/h` to read the log files in C++.

For MP4 video recording you can use the logging option `STATE_LOGGING_VIDEO_MP4`. We plan to implement various other types of logging, including logging the state of VR controllers.

As a special case, we implemented the logging of the Minitaur robot. The log file from pybullet simulation is identical to the real Minitaur quadruped log file. See `Bullet/examples/pybullet/examples/logMinitaur.py` for an example.

required	loggingType	int	<p>There are various types of logging implemented.</p> <p><code>STATE_LOGGING_MINITAUR</code>: This will require to load the <code>quadruped/quadruped.urdf</code> and object unique id from the <code>quadruped</code>. It logs the timestamp, IMU roll/pitch/yaw, 8 leg motor positions (<code>q0-q7</code>), 8 leg motor torques (<code>u0-u7</code>), the forward speed of the torso and mode (unused in simulation).</p> <p><code>STATE_LOGGING_GENERIC_ROBOT_DATA</code>: This will log a log of the data of either all objects or selected ones (if <code>objectUniquelds</code> is provided).</p> <p><code>STATE_LOGGING_VIDEO_MP4</code>: this will open an MP4 file and start streaming the OpenGL 3D visualizer pixels to the file using an</p>
----------	-------------	-----	--

			<p>ffmpeg pipe. It will require ffmpeg installed. You can also use avconv (default on Ubuntu), just create a symbolic link so that ffmpeg points to avconv. On Windows, ffmpeg has some issues that cause tearing/color artifacts in some cases.</p> <p>STATE_LOGGING_CONTACT_POINTS</p> <p>STATE_LOGGING_VR_CONTROLLERS.</p> <p>STATE_LOGGING_PROFILE_TIMINGS This will dump a timings file in JSON format that can be opened using Google Chrome about://tracing LOAD.</p>
required	fileName	string	file name (absolute or relative path) to store the log file data.
optional	objectUniquelds	list of int	If left empty, the logger may log every object, otherwise the logger just logs the objects in the objectUniquelds list.
optional	maxLogDof	int	Maximum number of joint degrees of freedom to log (excluding the base dofs). This applies to STATE_LOGGING_GENERIC_ROBOT_DATA. Default value is 12.
optional	bodyUniqueldA	int	Applies to STATE_LOGGING_CONTACT_POINTS. If provided, only log contact points involving bodyUniqueldA.
optional	bodyUniqueldB	int	Applies to STATE_LOGGING_CONTACT_POINTS. If provided, only log contact points involving bodyUniqueldB.
optional	linkIndexA	int	Applies to STATE_LOGGING_CONTACT_POINTS. If provided, only log contact points involving linkIndexA for bodyUniqueldA.
optional	linkIndexB	int	Applies to STATE_LOGGING_CONTACT_POINTS. If provided, only log contact points involving linkIndexB for bodyUniqueldA.
optional	deviceTypeFilter	int	deviceTypeFilter allows you to select what VR devices to log: VR_DEVICE_CONTROLLER, VR_DEVICE_HMD, VR_DEVICE_GENERIC_TRACKER or any combination of them. Applies to STATE_LOGGING_VR_CONTROLLERS. Default values is VR_DEVICE_CONTROLLER.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The command will return a non-negative int loggingUniqueld, that can be used with stopStateLogging.

Todo: document the data that is logged for each logging type. For now, use the log reading utilities to find out, or check out the [C++ source code of the logging](#) or Python [dumpLog.py](#) script.

stopStateLogging

You can stop a logger using its `loggingUniqueld`.

`submitProfileTiming`

`pybullet` and `Bullet` have instrumented many functions so you can see where the time is spent. You can dump those profile timings in a file, that can be viewed with Google Chrome in the `about://tracing` window using the `LOAD` feature. In the GUI, you can press 'p' to start/stop the profile dump. In some cases you may want to instrument the timings of your client code. You can submit profile timings using `pybullet`. Here is an example output:

Synthetic Camera Rendering

`pybullet` has both a build-in OpenGL GPU visualizer and a build-in CPU renderer based on `TinyRenderer`. This makes it very easy to render images from an arbitrary camera position.

The synthetic camera is specified by two 4 by 4 matrices: the view matrix and the projection matrix. Since those are not very intuitive, there are some helper methods to compute the view and projection matrix from understandable parameters.

`computeViewMatrix`

The `computeViewMatrix` input parameters are

required	<code>cameraEyePosition</code>	vec3, list of 3 floats	eye position in Cartesian world coordinates
required	<code>cameraTargetPosition</code>	vec3, list of 3 floats	position of the target (focus) point, in Cartesian world coordinates
required	<code>cameraUpVector</code>	vec3, list of 3 floats	up vector of the camera, in Cartesian world coordinates

Output is the 4x4 view matrix, stored as a list of 16 floats.

`computeViewMatrixFromYawPitchRoll`

The input parameters are

required	<code>cameraTargetPosition</code>	list of 3 floats	target focus point in Cartesian world coordinates
required	<code>distance</code>	float	distance from eye to focus point

required	yaw	float	yaw angle in degrees left/right around up-axis.
required	pitch	float	pitch in degrees up/down.
required	roll	float	roll in degrees around forward vector
required	upAxisIndex	int	either 1 for Y or 2 for Z axis up.

Output is the 4x4 view matrix, stored as a list of 16 floats.

computeProjectionMatrix

The input parameters are

required	left	float	left screen (canvas) coordinate
required	right	float	right screen (canvas) coordinate
required	bottom	float	bottom screen (canvas) coordinate
required	top	float	top screen (canvas) coordinate
required	near	float	near plane distance
required	far	float	far plane distance

Output is the 4x4 projection matrix, stored as a list of 16 floats.

computeProjectionMatrixFOV

This command also will return a 4x4 projection matrix, using different parameters. You can check out OpenGL documentation for the meaning of the parameters.

The input parameters are:

required	fov	float	field of view
required	aspect	float	aspect ratio
required	nearVal	float	near plane distance
required	farVal	float	far plane distance

getCameraImage

The getCameraImage API will return a RGB image, a depth buffer and a segmentation mask buffer with body unique ids of visible objects for each pixel. Note that pybullet can be compiled using the numpy option: using numpy will improve the performance of copying the camera

pixels from C to Python. Note: the old `renderImage` API is obsolete and replaced by `getCameraImage`.

`getCameraImage` input parameters:

required	width	int	horizontal image resolution in pixels
required	height	int	vertical image resolution in pixels
optional	viewMatrix	16 floats	4x4 view matrix, see <code>computeViewMatrix*</code>
optional	projectionMatrix	16 floats	4x4 projection matrix, see <code>computeProjection*</code>
optional	lightDirection	vec3, list of 3 floats	light direction
optional	lightColor	vec3, list of 3 floats	directional light color in [RED, GREEN, BLUE] in range 0..1
optional	lightDistance	float	distance of the light along the normalized <code>lightDirection</code>
optional	shadow	int	1 for shadows, 0 for no shadows
optional	lightAmbientCoeff	float	light ambient coefficient
optional	lightDiffuseCoeff	float	light diffuse coefficient
optional	lightSpecularCoeff	float	light specular coefficient
optional	renderer	int	ER_BULLET_HARDWARE_OPENGL or ER_TINY_RENDERER. Note that DIRECT mode has no OpenGL, so it requires ER_TINY_RENDERER.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

`getCameraImage` returns a list of parameters:

width	int	width image resolution in pixels (horizontal)
height	int	height image resolution in pixels (vertical)
rgbPixels	list of [char RED, char GREEN, char BLUE] [0..width*height]	list of pixel colors in R,G,B format, in range [0..255] for each color
depthPixels	list of float [0..width*height]	depth buffer

segmentationMaskBuffer	list of int [0..width*height]	for each pixels the visible object index
------------------------	-------------------------------	--

getVisualShapeData

You can access visual shape information using `getVisualShapeData`. You could use this to bridge your own rendering method with `pybullet` simulation, and synchronize the world transforms manually after each simulation step.

The input parameters are:

required	objectUniqueId	int	object unique id, as returned by a load method.
optional	physicsClientId	int	physics client id as returned by 'connect'

The output is a list of visual shape data, each visual shape is in the following format:

objectUniqueId	int	object unique id, same as the input
linkIndex	int	link index or -1 for the base
visualGeometryType	int	visual geometry type (TBD)
dimensions	vec3, list of 3 floats	dimensions (size, local scale) of the geometry
meshAssetFileName	string, list of chars	path to the triangle mesh, if any. Typically relative to the URDF, SDF or MJCF file location, but could be absolute.
localVisualFrame position	vec3, list of 3 floats	position of local visual frame, relative to link/joint frame
localVisualFrame orientation	vec4, list of 4 floats	orientation of local visual frame relative to link/joint frame
rgbaColor	vec4, list of 4 floats	URDF color (if any specified) in red/green/blue/alpha

The physics simulation uses center of mass as a reference for the Cartesian world transforms, in `getBasePositionAndOrientation` and in `getLinkState`. If you implement your own rendering, you need to transform the local visual transform to world space, making use of the center of mass world transform and the (inverse) `localInertialFrame`. You can access the `localInertialFrame` using the `getLinkState` API.

changeVisualShape

You can use `resetVisualShapeData` to change the texture of a shape. This texture will currently only affect the software renderer (see `getCameraImage`), not the OpenGL visualization window (yet).

required	<code>objectUniqueId</code>	int	object unique id, as returned by load method.
required	<code>jointIndex</code>	int	link index
optional	<code>shapeIndex</code>	int	shape index, within range. See <code>getVisualShapeData</code> .
optional	<code>textureUniqueId</code>	int	texture unique id, as returned by 'loadTexture' method
optional	<code>rgbaColor</code>	vec4, list of 4 floats	color components for RED, GREEN, BLUE and ALPHA, each in range [0..1]. Alpha has to be 0 (invisible) or 1 (visible) at the moment (no transparency yet).
optional	<code>specularColor</code>	vec3	specular color components, RED, GREEN and BLUE, can be from 0 to large number (>100).
required	<code>physicsClientId</code>	int	physics client id as returned by 'connect'

loadTexture

Load a texture from file and return a non-negative texture unique id if the loading succeeds. This unique id can be used with `resetVisualShapeData`.

Collision Detection Queries

You can query the contact point information that existed during the last 'stepSimulation'. To get the contact points you can use the 'getContactPoints' API. Note that the 'getContactPoints' will not recompute any contact point information.

getOverlappingObjects, getAABB

This query will return all the unique ids of objects that have axis aligned bounding box overlap with a given axis aligned bounding box.

The `getOverlappingObjects` input parameters are:

required	aabbMin	vec3, list of 3 floats	minimum coordinates of the aabb
required	aabbMax	vec3, list of 3 floats	maximum coordinates of the aabb
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The `getOverlappingObjects` will return a list of object unique ids.

getAABB

You can query the axis aligned bounding box (in world space) given an object unique id, and optionally a link index. (when you don't pass the link index, or use -1, you get the AABB of the base).

The input parameters are

required	bodyUniqueId	int	object unique id as returned by creation methods.
optional	linkIndex	int	link index in range [0..getNumJoints(..)]
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The return structure is a list of vec3, aabbMin (x,y,z) and aabbMax (x,y,z) in world space coordinates.

See also the [getAABB.py](#) example.

getContactPoints, getClosestPoints

The `getContactPoints` input parameters are as follows:

optional	bodyA	int	only report contact points that involve body A
optional	bodyB	int	only report contact points that involve body B
optional	linkIndexA	int	Only report contact points that involve linkIndexA of bodyA
optional	linkIndexB	int	Only report contact points that involve linkIndexB of bodyB
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

`getContactPoints` will return a list of contact points. Each contact point has the following fields:

contactFlag	int	reserved
bodyUniqueidA	int	body unique id of body A
bodyUniqueidB	int	body unique id of body B
linkIndexA	int	link index of body A, -1 for base
linkIndexB	int	link index of body B, -1 for base
positionOnA	vec3, list of 3 floats	contact position on A, in Cartesian world coordinates
positionOnB	vec3, list of 3 floats	contact position on B, in Cartesian world coordinates
contactNormalOnB	vec3, list of 3 floats	contact normal on B, pointing towards A
contactDistance	float	contact distance, positive for separation, negative for penetration
normalForce	float	normal force applied during the last 'stepSimulation'

getClosestPoints

It is also possible to compute the closest points, independent from stepSimulation. This also lets you compute closest points of objects with an arbitrary separating distance. In this query there will be no normal forces reported.

getClosestPoints input parameters:

required	bodyA	int	object unique id for first object (A)
required	bodyB	int	object unique id for second object (B)
required	distance	float	If the distance between objects exceeds this maximum distance, no points may be returned.
optional	linkIndexA	int	link index for object A (-1 for base)
optional	linkIndexB	int	link index for object B (-1 for base)
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

getClosestPoints returns a list of closest points in the same format as getContactPoints (but normalForce is always zero in this case)

rayTest, rayTestBatch

You can perform a single raycast to find the intersection information of the first object hit.

The rayTest input parameters are:

required	rayFromPosition	vec3, list of 3 floats	start of the ray in world coordinates
required	rayToPosition	vec3, list of 3 floats	end of the ray in world coordinates
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The raytest query will return the following information in case of an intersection:

objectUniqueld	int	object unique id of the hit object
linkIndex	int	link index of the hit object, or -1 if none/parent.
hit fraction	float	hit fraction along the ray in range [0,1] along the ray.
hit position	vec3, list of 3 floats	hit position in Cartesian world coordinates
hit normal	vec3, list of 3 floats	hit normal in Cartesian world coordinates

rayTestBatch

This is similar to the rayTest, but allows you to provide an array of rays, for faster execution. The size of 'rayFromPositions' needs to be equal to the size of 'rayToPositions'. You can one ray result per ray, even if there is no intersection: you need to use the objectUniqueld field to check if the ray has hit anything: if the objectUniqueld is -1, there is no hit. In that case, the 'hit fraction' is 1. The maximum number of rays per batch is `pybullet.MAX_RAY_INTERSECTION_BATCH_SIZE`.

The rayTest input parameters are:

required	rayFromPositions	list of vec3, list of list of 3 floats	list of start points for each ray, in world coordinates
required	rayToPositions	list of vec3, list of list of 3 floats	list of end points for each ray in world coordinates
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

Output is one ray intersection result per input ray, with the same information as in above rayTest query.

Inverse Dynamics, Kinematics

calculateInverseDynamics

calculateInverseDynamics will compute the forces needed to reach the given joint accelerations, starting from specified joint positions and velocities.

The calculateInverseDynamics input parameters are:

required	bodyUniqueId	int	body unique id, as returned by loadURDF etc.
required	jointPositions	list of float	joint positions (angles)
required	jointVelocities	list of float	joint velocities
required	jointAccelerations	list of float	desired joint accelerations
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

calculateInverseDynamics returns a list of joint forces.

Inverse Kinematics

You can compute the joint angles that makes the end-effector reach a given target position in Cartesian world space. Internally, Bullet uses an improved version of Samuel Buss Inverse Kinematics library. At the moment only the Damped Least Squares method with or without Null Space control is exposed, with a single end-effector target. Optionally you can also specify the target orientation of the end effector. In addition, there is an option to use the null-space to specify joint limits and rest poses. This optional null-space support requires all 4 lists (lowerLimits, upperLimits, jointRanges, restPoses), otherwise regular IK will be used. See also inverse_kinematics.py example in Bullet/examples/pybullet/examples folder for details.

calculateInverseKinematics

calculateInverseKinematics input parameters are:

required	bodyUniqueId	int	body unique id, as returned by loadURDF
required	endEffectorLinkIndex	int	end effector link index
required	targetPosition	vec3, list of 3 floats	target position in Cartesian world space

optional	targetOrientation	vec3, list of 4 floats	target orientation in Cartesian world space, quaternion [x,y,w,z]. If not specified, pure position IK will be used.
optional	lowerLimits	list of floats [0..nDof]	Optional null-space IK requires all 4 lists (lowerLimits, upperLimits, jointRanges, restPoses). Otherwise regular IK will be used.
optional	upperLimits	list of floats [0..nDof]	lowerLimit and upperLimit specify joint limits
optional	jointRanges	list of floats [0..nDof]	
optional	restPoses	list of floats [0..nDof]	Favor an IK solution closer to a given rest pose
optional	jointDamping	list of floats [0..nDof]	jointDamping allow to tune the IK solution using joint damping factors
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

calculateInverseKinematics returns a list of joint positions. See [Bullet/examples/pybullet/inverse_kinematics.py](#) for an example.

Virtual Reality

See also the [vrBullet quickstart guide](#).

The VR physics server uses the OpenVR API for HTC Vive and Oculus Rift Touch controller support. OpenVR is currently working on Windows, Valve is also working on a [Linux version](#).

See also <https://www.youtube.com/watch?v=VMJyZtHQL50> for an example video of the VR example, part of Bullet, that can be fully controlled using pybullet over shared memory, UDP or TCP connection.



For VR on Windows, it is recommended to compile the Bullet Physics SDK using Microsoft Visual Studio (MSVC). Generate MSVC project files by running the "build_visual_studio_vr_pybullet_double.bat" script. You can customize this small script to point to the location of Python etc. Make sure to switch to 'Release' configuration of MSVC and build and run the App_PhysicsServer_SharedMemory_VR*.exe. By default, this VR application will load robot assets as shown in the above video. You can start with an empty VR world using the command-line option --norobotassets.

getVREvents, setVRCameraState

getVREvents will return a list events for a selected VR devices that changed state since the last call to getVREvents. When not providing any deviceTypeFilter, the default is to only report VR_DEVICE_CONTROLLER state. You can choose any combination of devices including VR_DEVICE_CONTROLLER, VR_DEVICE_HMD (Head Mounted Device) and VR_DEVICE_GENERIC_TRACKER (such as the HTC Vive Tracker).

Note that VR_DEVICE_HMD and VR_DEVICE_GENERIC_TRACKER only report position and orientation events. getVREvents has the following parameters:

optional	deviceTypeFilter	int	default is VR_DEVICE_CONTROLLER . You can also choose VR_DEVICE_HMD or VR_DEVICE_GENERIC_TRACKER or any combination of them.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one.

The output parameters are:

controllerId	int	controller index (0..MAX_VR_CONTROLLERS)
controllerPosition	vec3, list of 3 floats	controller position, in world space Cartesian coordinates
controllerOrientation	vec4, list of 4 floats	controller orientation quaternion [x,y,z,w] in world space
controllerAnalogueAxis	float	analogue axis value
numButtonEvents	int	number of button events since last call to getVREvents
numMoveEvents	int	number of move events since last call to getVREvents
buttons	int[8], list of 8 integers	flags for each button: VR_BUTTON_IS_DOWN (currently held down), VR_BUTTON_WAS_TRIGGERED (went down at least once since last cal to getVREvents), VR_BUTTON_WAS_RELEASED (was released at least once since last call to getVREvents). Note that only VR_BUTTON_IS_DOWN reports actual current state. For example if the button went down and up, you can tell from the RELEASE/TRIGGERED flags, even though IS_DOWN is still false. Note that in the log file, those buttons are packed with 10 buttons in 1 integer (3 bits per button).
deviceType	int	type of device: VR_DEVICE_CONTROLLER, VR_DEVICE_HMD or VR_DEVICE_GENERIC_TRACKER

See `Bullet/examples/pybullet/examples/vrEvents.py` for an example of VR drawing and `Bullet/examples/pybullet/examples/vrTracker.py` to track HMD and generic tracker.

setVRCameraState

`setVRCameraState` allows to set the camera root transform offset position and orientation. This allows to control the position of the VR camera in the virtual world. It is also possible to let the VR Camera track an object, such as a vehicle.

`setVRCameraState` has the following arguments (there are no return values):

optional	<code>rootPosition</code>	vec3, vector of 3 floats	camera root position
optional	<code>rootOrientation</code>	vec3, vector of 3 floats	camera root orientation
optional	<code>trackObject</code>	vec3, vector of 3 floats	the object unique id to track
optional	<code>trackObjectFlag</code>	int	<code>flags.VR_CAMERA_TRACK_OBJECT_ORIENTATION</code> (if enabled, both position and orientation is tracked)
optional	<code>physicsClientId</code>	int	if you are connected to multiple servers, you can pick one.

Debug GUI, Lines, Text, Parameters

`pybullet` has some functionality to make it easier to debug, visualize and tune the simulation. This feature is only useful if there is some 3D visualization window, such as GUI mode or when connected to a separate physics server (such as Example Browser in 'Physics Server' mode or standalone Physics Server with OpenGL GUI).

addUserDebugLine, Text

You can add a 3d line specified by a 3d starting point (from) and end point (to), a color [red,green,blue], a line width and a duration in seconds. The arguments to `addUserDebugline` are:

required	<code>lineFromXYZ</code>	vec3, list of 3 floats	starting point of the line in Cartesian world coordinates
required	<code>lineToXYZ</code>	vec3, list of 3 floats	end point of the line in Cartesian world coordinates
optional	<code>lineColorRGB</code>	vec3, list of 3 floats	RGB color [Red, Green, Blue] each component in range [0..1]

optional	lineWidth	float	line width (limited by OpenGL implementation)
optional	lifeTime	float	use 0 for permanent line, or positive time in seconds (afterwards the line with be removed automatically)
optional	parentObjectUniqueld	int	new in upcoming pybullet 1.0.8: draw line in local coordinates of a parent object/link.
optional	parentLinkIndex	int	new in upcoming pybullet 1.0.8: draw line in local coordinates of a parent object/link.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

`addUserDebugLine` will return a non-negative unique id, that lets you remove the line using `removeUserDebugItem`.

addUserDebugText

You can add some 3d text at a specific location using a color and size. The input arguments are:

required	text	text	text represented as a string (array of characters)
required	textPosition	vec3, list of 3 floats	3d position of the text in Cartesian world coordinates [x,y,z]
optional	textColorRGB	vec3, list of 3 floats	RGB color [Red, Green, Blue] each component in range [0..1]
optional	textSize	float	Text size
optional	lifeTime	float	use 0 for permanent text, or positive time in seconds (afterwards the text with be removed automatically)
optional	textOrientation	vec3, list of 3 floats	By default, debug text will always face the camera, automatically rotation. By specifying a text orientation (quaternion), the orientation will be fixed in world space or local space (when parent is specified)
optional	parentObjectUniqueld	int	new in upcoming pybullet 1.0.8: draw line in local coordinates of a parent object/link.
optional	parentLinkIndex	int	new in upcoming pybullet 1.0.8: draw line in local coordinates of a parent object/link.

`addUserDebugText` will return a non-negative unique id, that lets you remove the line using `removeUserDebugItem`. See also `pybullet/examples/debugDrawItems.py`

addUserDebugParameter, readUserDebugParameter

addUserDebugParameter lets you add custom sliders to tune parameters. It will return a unique id. This lets you read the value of the parameter using readUserDebugParameter. The input parameters of addUserDebugParameter are:

required	paramName	string	name of the parameter
required	rangeMin	float	minimum value
required	rangeMax	float	maximum value
required	startValue	float	starting value
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

The input parameters of readUserDebugParameter are:

required	itemUniqueId	int	the unique id returned by 'addUserDebugParameter)
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

Return value is the most up-to-date reading of the parameter.

removeUserDebugItem

The functions to add user debug lines, text or parameters will return a non-negative unique id if it succeeded. You can remove the debug item using this unique id using the removeUserDebugItem method. The input parameters are:

required	itemUniqueId	int	unique id of the debug item to be removed (line, text etc)
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

setDebugObjectColor

The built-in OpenGL visualizers have a wireframe debug rendering feature: press 'w' to toggle. The wireframe has some default colors. You can override the color of a specific object and link using setDebugObjectColor. The input parameters are:

required	objectUniqueld	int	unique id of the object
required	linkIndex	int	link index
optional	objectDebugColorRGB	vec3, list of 3 floats	debug color in [Red,Green,Blue]. If not provided, the custom color will be removed.
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

configureDebugVisualizer

You can configure some settings of the built-in OpenGL visualizer, such as enabling or disabling wireframe, shadows and GUI rendering. This is useful since some laptops or Desktop GUIs have performance issues with our OpenGL 3 visualizer.

required	flag	int	The feature to enable or disable, such as COV_ENABLE_WIREFRAME, COV_ENABLE_SHADOWS, COV_ENABLE_GUI, COV_ENABLE_VR_PICKING, COV_ENABLE_VR_TELEPORTING, COV_ENABLE_KEYBOARD_SHORTCUTS, COV_ENABLE_MOUSE_PICKING
required	enable	int	0 or 1
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

Example:

```
pybullet.configureDebugVisualizer(pybullet.COV_ENABLE_WIREFRAME,1)
```

get/resetDebugVisualizerCamera

You can set the 3D OpenGL debug visualizer camera distance (between eye and camera target position), camera yaw and pitch and camera target position.

required	cameraDistance	float	distance from eye to camera target position
required	cameraYaw	float	camera yaw angle (in degrees) left/right
required	cameraPitch	float	camera pitch angle (in degrees) up/down
required	cameraTargetPosition	vec3, list of 3 floats	cameraTargetPosition is the camera focus point
optional	physicsClientId	int	if you are connected to multiple servers, you can pick one

Example: `pybullet.resetDebugVisualizerCamera(cameraDistance=3, cameraYaw=30, cameraPitch=52, cameraTargetPosition=[0,0,0])`

getDebugVisualizerCamera

You can get the width and height (in pixels) of the camera, its view and projection matrix using this command. Input parameter is the optional physicsClientId. Output information is:

width	int	width of the camera image in pixels
height	int	height of the camera image in pixels
viewMatrix	float16, list of 16 floats	view matrix of the camera
projectionMatrix	float16, list of 16 floats	projection matrix of the camera
cameraUp	float3, list of 3 floats	up axis of the camera, in Cartesian world space coordinates
cameraForward	float3, list of 3 floats	forward axis of the camera, in Cartesian world space coordinates
horizontal	float3, list of 3 floats	TBD. This is a horizontal vector that can be used to generate rays (for mouse picking or creating a simple ray tracer for example)
vertical	float3, list of 3 floats	TBD. This is a vertical vector that can be used to generate rays (for mouse picking or creating a simple ray tracer for example).
yaw	float	yaw angle of the camera, in Cartesian local space coordinates
pitch	float	pitch angle of the camera, in Cartesian local space coordinates
dist	float	distance between the camera and the camera target
target	float3, list of 3 floats	target of the camera, in Cartesian world space coordinates

getKeyboardEvents, getMouseEvents

You can receive all keyboard events that happened since the last time you called 'getKeyboardEvents'. Each event has a keycode and a state. The state is a bit flag combination of KEY_IS_DOWN, KEY_WAS_TRIGGERED and KEY_WAS_RELEASED. If a key is going from 'up' to 'down' state, you receive the KEY_IS_DOWN state, as well as the KEY_WAS_TRIGGERED state. If a key was pressed and released, the state will be KEY_IS_DOWN and KEY_WAS_RELEASED.

Some special keys are defined: B3G_F1 ... B3G_F12, B3G_LEFT_ARROW, B3G_RIGHT_ARROW, B3G_UP_ARROW, B3G_DOWN_ARROW, B3G_PAGE_UP, B3G_PAGE_DOWN, B3G_PAGE_END, B3G_HOME, B3G_DELETE, B3G_INSERT, B3G_ALT, B3G_SHIFT, B3G_CONTROL, B3G_RETURN.

The input of `getKeyBoardEvents` is an optional `physicsClientId`:

optional	<code>physicsClientId</code>	int	if you are connected to multiple servers, you can pick one
----------	------------------------------	-----	--

The output is a dictionary of keycode 'key' and keyboard state 'value'.

getMouseEvents

Similar to `getKeyboardEvents`, you can get the mouse events that happened since the last call to `getMouseEvents`. All the mouse move events are merged into a single mouse move event with the most up-to-date position. In addition, all mouse button events for a given button are merged. If a button went down and up, the state will be 'KEY_WAS_TRIGGERED'. We reuse the KEY_WAS_TRIGGERED /KEY_IS_DOWN /KEY_WAS_RELEASED for the mouse button states.

Input arguments to `getMouseEvents` are:

optional	<code>physicsClientId</code>	int	if you are connected to multiple servers, you can pick one
----------	------------------------------	-----	--

The output is a list of mouse events in the following format:

<code>eventType</code>	int	MOUSE_MOVE_EVENT=1, MOUSE_BUTTON_EVENT=2
<code>mousePosX</code>	float	x-coordinates of the mouse pointer
<code>mousePosY</code>	float	y-coordinates of the mouse pointer
<code>buttonIndex</code>	int	button index for left/middle/right mouse button
<code>buttonState</code>	int	flag KEY_WAS_TRIGGERED /KEY_IS_DOWN /KEY_WAS_RELEASED

Build and install pybullet

There are a few different ways to install pybullet on Windows, Mac OSX and Linux. We use Python 2.7 and Python 3.5.2, but expect most Python 2.x and Python 3.x versions should work. The easiest to get pybullet to work is using pip or python setup.py:

Using Python pip

Make sure Python and pip is installed, and then run:

```
pip install pybullet
```

Note that if you used pip to install pybullet, it is still beneficial to also install the C++ Bullet Physics SDK: it includes data files, physics servers and tools useful for pybullet.

You can also run 'python setup.py build' and 'python setup.py install' in the root of the Bullet Physics SDK (get the SDK from <http://github.com/bulletphysics/bullet3>)

See also <https://pypi.python.org/pypi/pybullet>

Alternatively you can install pybullet from source code using premake (Windows) or cmake:


Using premake for Windows

Make sure some Python version is installed in c:\python-3.5.2 (or other version folder name)

First get the source code from github, using
git clone <https://github.com/bulletphysics/bullet3>

Click on build_visual_studio_vr_pybullet_double.bat and open the 0_Bullet3Solution.sln project in Visual Studio, convert projects if needed.

Switch to Release mode, and compile the 'pybullet' project.

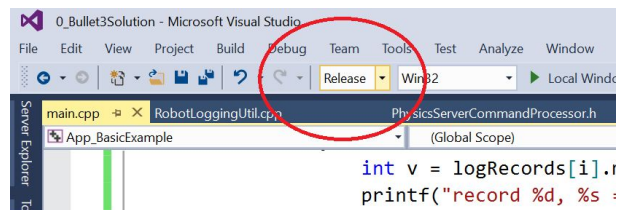

Then there are a few options to import pybullet in a Python interpreter:

- 1) Rename pybullet_vs2010..dll to pybullet.pyd and start the Python.exe interpreter using bullet/bin as the current working directory. Optionally for debugging: rename bullet/bin/pybullet_vs2010_debug.dll to pybullet_d.pyd and start python_d.exe)
- 2) Rename bullet/bin/pybullet_vs2010..dll to pybullet.pyd and use command prompt: export PYTHONPATH=c:\develop\bullet3\bin (replace with actual folder where Bullet is located) or create this PYTHONPATH environment variable using Windows GUI
- 3) create an administrator prompt (cmd.exe) and create a symbolic link as follows

```
cd c:\python-3.5.2\dlls
```

```
mklink pybullet.pyd c:\develop\bullet3\bin\pybullet_vs2010.dll
```

Then run python.exe and import pybullet should work.

Using cmake on Linux and Mac OSX

First get the source code from github, using
git clone <https://github.com/bulletphysics/bullet3>

- 1) Download and install cmake
- 2) Run the shell script in the root of Bullet:
build_cmake_pybullet_double.sh
- 3) Make sure Python finds our pybullet.so module:
export PYTHONPATH = /your_path_to_bullet/build_cmake/examples/pybullet

That's it. Test pybullet by running a python interpreter and enter 'import pybullet' to see if the module loads. If so, you can play with the pybullet scripts in Bullet/examples/pybullet.

Possible Mac OSX Issues

- If you have any issues importing pybullet on Mac OSX, make sure you run the right Python interpreter, matching the include/libraries set in -DPYTHON_INCLUDE_DIR and -DPYTHON_LIBRARY (using cmake). It is possible that you have multiple Python interpreters installed, for example when using homebrew. See [this comment](#) for an example.
- When using the non-Framework version of Python (Anaconda for example), try using one of the following options:
 - CFLAGS="-DB3_NO_PYTHON_FRAMEWORK" pip install pybullet
 - CFLAGS="-DB3_NO_PYTHON_FRAMEWORK" sudo python setup.py install

Possible Linux Issues

- Make sure OpenGL is installed
- When using Anaconda as Python distribution, conda install libgcc so that 'GLIBCXX' is found (see <http://askubuntu.com/questions/575505/glibcxx-3-4-20-not-found-how-to-fix-this-error>)
- It is possible that cmake cannot find the python libs when using Anaconda as Python distribution. You can add them manually by going to the ../build_cmake/CMakeCache.txt file and changing following line:

```
'PYTHON_LIBRARY:FILEPATH=/usr/lib/python2.7/config-x86_64-linux-gnu/libpython2.7
.so'
```

GPU or virtual machine lacking OpenGL 3

- By default pybullet uses OpenGL 3. Some remote desktop environments and GPUs don't support OpenGL 3, leading to artifacts (grey screen) or even crashes. You can use the `--opengl2` flag to fall back to OpenGL 2. This is not fully supported, but it give you some way to view the scene.:
 - `pybullet.connect(pybullet.GUI,options="--opengl2")`
- Alternatively, you can run the physics server on the remote machine, with UDP or TCP bridge, and connect from local laptop to the remote server over UDP tunneling. (todo: describe steps in detail)

FAQ and Tips

Question: What happens to Bullet 2.x and the Bullet 3 OpenCL implementation?

Answer: pybullet is wrapping the [Bullet C-API](#). We will put the Bullet 3 OpenCL GPU API (and future Bullet 4.x API) behind this C-API. So if you use pybullet or the C-API you are future-proof. Not to be confused with the Bullet 2.x C++ API.

Question: Should I use torque/force control or velocity/position control mode?

In general it is best to start with position or velocity control.

It will take much more effort to get force/torque control working reliably.

Question: How to turn off gravity only for some parts of a robot (for example the arm)?

Answer:

At the moment this is not exposed, so you would need to either turn of gravity acceleration for all objects, and manually apply gravity for the objects that need it. Or you can actively compute gravity compensation forces, like happens on a real robot. Since Bullet has a full constraint system, it would be trivial to compute those anti-gravity forces: You could run a second simulation (pybullet lets you connect to multiple physics servers) and position the robot under gravity, set joint position control to keep the position as desired, and gather those 'anti-gravity' forces. Then apply those in the main simulation.

Question: How to scale up/down objects?

Answer:

Scaling of visual shapes and collision shapes is part of most file formats, such as URDF and SDF. There is currently no programmatic access to modify scaling after loading.

Question: How can I get textures in my models?

Answer: You can use the Wavefront .obj file format. This will support material files (.mtl). There are various examples using textures in the Bullet/data folder. There is no programmatic way of changing textures (aside from using TinyRenderer, the C++ software renderer to get camera image data).

Question: Which texture file formats are valid for pybullet?

Answer: Bullet uses stb_image to load texture files, which loads PNG, JPG, TGA, GIF etc. see [stb_image.h](#) for details.

Question: How can I improve the performance and stability of the collision detection?

Answer: There are many ways to optimize, for example:
shape type

- 1) Choose one or multiple primitive collision shape types such as box, sphere, capsule, cylinder to approximate an object, instead of using convex or concave triangle meshes.
- 2) If you really need to use triangle meshes, create a convex decomposition using Hierarchical Approximate Convex Decomposition (v-HACD). The [test_hacd utility](#) converts convex triangle mesh in an OBJ file into a new OBJ file with multiple convex hull objects. See for example [Bullet/data/teddy_vhacd.urdf](#) pointing to [Bullet/data/teddy2_VHACD_CHs.obj](#), or [duck_vhacd.urdf](#) pointing to [duck_vhacd.obj](#).
- 3) Reduce the number of vertices in a triangle mesh. For example Blender 3D has a great mesh decimation modifier that interactively lets you see the result of the mesh simplification.
- 4) Use rolling friction and spinning friction for round objects such as sphere and capsules and robotic grippers using the <rolling_friction> and <spinning_friction> nodes inside <link><contact> nodes. See for example [Bullet/data/sphere2.urdf](#)
- 5) Use a small amount of compliance for wheels using the <stiffness value="30000"/> <damping value="1000"/> inside the URDF <link><contact> xml node. See for example the [Bullet/data/husky/husky.urdf](#) vehicle.
- 6) Use the double precision build of Bullet, this is good both for contact stability and collision accuracy. Choose some good constraint solver setting and time step.
- 7) Decouple the physics simulation from the graphics. pybullet already does this for the GUI and various physics servers: the OpenGL graphics visualization runs in its own thread, independent of the physics simulation.

Question: What are the options for friction handling?

Answer: by default, Bullet and pybullet uses a pyramidal approximation of the Coulomb friction model. You can enable rolling and spinning friction by adding a <rolling_friction> and <spinning_friction> node inside the <link><contact> node, see the [Bullet/data/sphere2.urdf](#) for example. Instead of the pyramid approximation, we will enable the option for Coulomb friction using an actual implicit cone.

Question: What kind of constant or threshold inside Bullet, that makes high speeds impossible?

Answer: By default, Bullet relies on discrete collision detection in combination with penetration recovery. Relying purely on discrete collision detection means that an object should not travel faster than its own radius within one timestep. Bullet has is an option for continuous collision detection to catch collisions for objects that move faster than their own radius within one timestep. This will be enabled in pybullet.